



XIAMEN OLINK IMPORT & EXPORT CO.,LTD





### Applicable Condition And Product Materials

Product Model	CDF-200/3	Rated Current	32A
Rated Voltage	450V	Wiring range	0.5mm <sup>2</sup> -4.0mm <sup>2</sup>
Cable OD.	Φ4-Φ10mm	Shell material	flame retardant nylon
Number of cores	2P/3P	Contact material	brass nickel plated
Operating temperature	-40°C~95°C	Wiring method	Screw/Crimp
Protection level	IP68/water depth 4m		

CDF-200

## Terminal

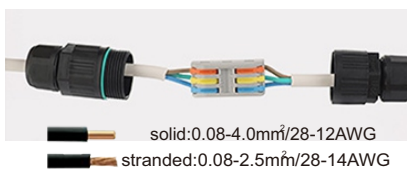

## Wiring method

Easy operation, easy to insert, convenient, fast, safe and reliable



\*Insert the terminal block with the core wire into the hollow tube



\*Tighten the nut until the waterproof core is tightened to the cable



\*Complete wiring

